



OIF OPTICAL
INTERNETWORKING
FORUM

**Micro
Integrable Tunable Laser Assembly
Implementation Agreement**

OIF-MicroITLA-01.1

July 13th, 2015

Implementation Agreement created and approved
by the Optical Internetworking Forum
www.oiforum.com

The OIF is an international non profit organization with over 100 member companies, including the world’s leading carriers and vendors. Being an industry group uniting representatives of the data and optical worlds, OIF’s purpose is to accelerate the deployment of interoperable, cost-effective and robust optical internetworks and their associated technologies. Optical internetworks are data networks composed of routers and data switches interconnected by optical networking elements.

With the goal of promoting worldwide compatibility of optical internetworking products, the OIF actively supports and extends the work of national and international standards bodies. Working relationships or formal liaisons have been established with CFP-MSA, COAST, Ethernet Alliance, Fibre Channel T11, IEEE 802.1, IEEE 802.3, IETF, InfiniBand, ITU-T SG13, ITU-T SG15, MEF, ONF, Rapid I/O, SAS T10, SFF Committee, TMF and TMOC.

For additional information contact:

The Optical Internetworking Forum, 48377 Fremont Blvd.,
Suite 117, Fremont, CA 94538
+1 510-492-4040 ✦ info@oiforum.com
www.oiforum.com

Notice: This Technical Document has been created by the Optical Internetworking Forum (OIF). This document is offered to the OIF Membership solely as a basis for agreement and is not a binding proposal on the companies listed as resources above. The OIF reserves the rights to at any time to add, amend, or withdraw statements contained herein. Nothing in this document is in any way binding on the OIF or any of its members.

The user's attention is called to the possibility that implementation of the OIF implementation agreement contained herein may require the use of inventions covered by the patent rights held by third parties. By publication of this OIF implementation agreement, the OIF makes no representation or warranty whatsoever, whether expressed or implied, that implementation of the specification will not infringe any third party rights, nor does the OIF make any representation or warranty whatsoever, whether expressed or implied, with respect to any claim that has been or may be asserted by any third party, the validity of any patent rights related to any such claim, or the extent to which a license to use any such rights may or may not be available or the terms hereof.

© 2015 Optical Internetworking Forum

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction other than the following, (1) the above copyright notice and this paragraph must be included on all such copies and derivative works, and (2) this document itself may not be modified in any way, such as by removing the copyright notice or references to the OIF, except as needed for the purpose of developing OIF Implementation Agreements.

By downloading, copying, or using this document in any manner, the user consents to the terms and conditions of this notice. Unless the terms and conditions of this notice are breached by the user, the limited permissions granted above are perpetual and will not be revoked by the OIF or its successors or assigns.

This document and the information contained herein is provided on an “AS IS” basis and THE OIF DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY, TITLE OR FITNESS FOR A PARTICULAR PURPOSE..

1 Table of Contents

1	Table of Contents.....	3
2	List of Tables.....	4
3	List of Figures.....	5
4	Document Revision History	6
5	References and Conventions.....	7
5.1	External Reference Documents	7
5.2	Conventions Used in This Document	7
6	Introduction	8
6.1	Scope.....	8
6.2	Background.....	8
7	Physical Layer & Electrical Characteristics	9
7.1	Assembly Electrical Interface	9
7.1.1	Electrical Connector on User's Board.....	9
7.1.2	Pin Assignments.....	9
7.1.3	Electrical Characteristics	10
8	Transport Layer.....	11
9	Command Interface (Application Layer)	12
10	Alarm and Status Register Behavior.....	13
11	Optical Specifications.....	14
12	The Mechanical Specifications	15
12.1	Micro-ITLA Mechanical Outline Dimensions	15
13	Appendix A: Open Issues / Current Work Items.....	17
14	Appendix B: List of Companies and Contributors.....	17
14.1	Technical Contributors	17
14.2	List of OIF Member Companies (at time of adoption).....	18
15	Document Index.....	19

2 List of Tables

Table 7.1-1 Pin Assignments.....	9
Table 7.1-2 Function of additional pin	9
Table 7.1-3: Additional Electrical Characteristics.....	10
Table 7.1-4: Replaced Electrical Characteristics	10
Table 12.1-1: Mechanical Outline Dimensions	16

3 List of Figures

Figure 12.1-1 Mechanical Outline Dimensions 16

4 Document Revision History

Version	Date	Description
1,0	September 20, 2011	Official Release
1,1	May 5, 2014	Correction of connector gender in section 7.1.1 References to OIF-ITLA-MSA-1.2 revised to OIF-ITLA-MSA-1.3. This reflects the high resolution frequency register option
1,1	May 30 th 2014	Added reference to connector manufacturer in section 7.1.1 as proposed in oif2014.188
1.1	July 13 th 2015	Added list of members at Principal Ballot date

Working Group: **Physical Link Layer**

TITLE: **Micro - ITLA Implementation Agreement
(OIF-MicroITLA)**

SOURCE: **Heino Bukkems** **Karl Gass**
 Technical editor Working Group Chair
 Emcore Corporation Sandia National Laboratories
 8674 Thornton Avenue P.O. Box 5800 MS-0874
 Newark, CA 96540 Albuquerque, NM 87185
 Phone: 510 566 3553 Phone: 505 844 8849
 Email: Heino_bukkems@emcore.com Email: kgass@sandia.gov

MAINTENANCE: **Stephen Gardner &
Michael Rigby-Jones**
 Oclaro Technology
 Westfield Business Park
 Long Road
 Paignton
 Devon, UK. TQ4 7AU
 Email:stephen.gardner@oclaro.com
 michael.rigby-jones@oclaro.com

DATE: **13th July 2015**

Project Name: **Micro - Integrable Tunable Laser Assembly IA (OIF-MicroITLA)**
Project Number: OIF-0063
Project Abstract: The objective of this project is to define an implementation agreement for a small form factor ITLA. It needs to be read in conjunction with the OIF-ITLA-MSA 1.2 and defines changes to the electrical and mechanical definition.

Document Maintenance:
 As a result of document maintenance users will need to refer to ITLA-MSA 1.3 to obtain information on high resolution registers.

5 References and Conventions

5.1 External Reference Documents

The following documents should be read in conjunction with this specification

OIF-ITLA-MSA-1.3	OIF Tunable Laser MSA Implementation Agreement (www.oiforum.com)
300 Pin MSA	1) Reference Document for 300 PIN 10Gb Transponder 2) Reference Document for 300 PIN 40Gb Transponder 3) I ² C Reference Document for 300 Pin MSA 10G and 40G Transponder
GR-468-CORE	General Reliability Assurance Requirements for Optoelectronic Devices Used in Telecommunications Equipment
GR-1217-CORE	Generic Requirements for Separable Electrical Connectors Used in Telecommunications Hardware
CENELEC	EN50081-1 Electromagnetic Compatibility – Generic Emissions Standard part 1: Residential, Commercial and Light Industry EN50082-1 Electromagnetic Compatibility – Generic Immunity Standard part 1: Residential, Commercial and Light Industry EN50081-1 Electromagnetic Compatibility – Generic Emissions Standard part 2: Residential, Commercial and Light Industry
EIA RS-232D	The RS232 Bus Specification
21CFR1040.10	Laser Safety
IEC 60825-1	Safety Of Laser Products Part1: Equipment Classification, Requirements and Users Guide
G.694.1	Spectral grids for WDM applications: DWDM frequency grid

5.2 Conventions Used in This Document

OIF-ITLA-MSA 1.2	OIF Tunable Laser MSA Implementation Agreement version 1.2
OIF-ITLA-MSA 1.3	OIF Tunable Laser MSA Implementation Agreement version 1.3
ITLA	Integrable Tunable Laser Assembly, as defined in OIF-ITLA-MSA 1.3
Micro-ITLA	Small form-factor ITLA, as defined in this implementation agreement
Module	Refers to the Micro-ITLA as a module.

6 Introduction

This section introduces the Micro-ITLA. The reader should refer back to OIF-ITLA-MSA 1.3 for an overview of the communication and commands (section 6.3 – 6.5).

6.1 Scope

This document describes an additional mechanical form-factor to the Multi-Source Agreement OIF-ITLA-MSA 1.3.

Referring back to OIF-ITLA-MSA 1.3 document, this Implementation Agreement only details the electrical and mechanical characteristics for which the Micro-ITLA implementation agreement replaces OIF-ITLA-MSA 1.3.

6.2 Background

The OIF has completed three tunable laser projects.

The first project resulted in the *Tunable Laser Implementation Agreement*, OIF-TL-01.1 began in April 2001 and was released in November 2002. A large number of contributors from a wide variety of consumers and suppliers of tunable lasers were involved in contributing and reviewing the first Implementation Agreement. It addressed the communication protocol, electrical interface and mechanical form factor interoperability for tunable continuous wavelength (CW) lasers. The document serves as a roadmap for future tunable device implementation agreements.

In February 2003, the OIF began a new fast track project, the *Tunable Laser MSA Implementation Agreement*. This MSA-IA builds upon the existing *Tunable Laser Implementation Agreement*, generating a more comprehensive specification of the optical, electrical, mechanical, and communication protocols. It was completed in May 2003.

In October 2003, the OIF began a new project #0013, the *Integrable Tunable Laser Assembly (ITLA) MSA Implementation Agreement* to focus on standardization of a CW laser subassembly for integration into both the 3.5" x 4.5" transponder as well as the small form factor transponder. This Implementation Agreement (OIF-ITLA-MSA1.1) was completed in November 2005. In June 2008 a maintenance update (OIF-ITLA-MSA 1.2) was released.

In July 2010, the OIF initiated project #0063, the *Micro Integrable Tunable Laser Assembly (Micro-ITLA) Implementation Agreement* to define an alternate smaller form-factor for a module with the performance of an ITLA. The objective was to realize at least a factor two reduction in area and a reduction in height. In addition the power consumption and max case temperature was to be revisited.

The OIF Implementation Agreements can be found at www.oiforum.com. The link to these documents is <http://www.oiforum.com/documents/implementation-agreements/>

7 Physical Layer & Electrical Characteristics

This section describes the electrical interface and the physical layer interface. The reader should refer back to OIF-ITLA-MSA 1.3 for all specifications that are not specifically included in this document.

7.1 Assembly Electrical Interface

7.1.1 Electrical Connector on User's Board

User's connector on transponder board: Advanced Interconnections Corp. DHS-2-14-844-G-G-M or equivalent.

Note: Connection from Micro-ITLA module made through appropriate male mating connector. e.g. Advanced Interconnections Corp. DHAM-2-14-846-GH-M and SK11015 are examples of a suitable GR-1217-CORE compliant connector.

7.1.2 Pin Assignments

The pin assignments are shown in Table 7.1-1. In addition to the pin assignments in OIF-ITLA-MSA1.3, pin 13 has been assigned to a +1.8V voltage supply. The use of pin 13 and pin 14 is optional and vendor specified.

Table 7.1-1 Pin Assignments

PIN Name	PIN #		PIN #	PIN Name
+3.3V Supply	1		2	DIS*
+3.3V Supply	3		4	SRQ*
Gnd	5		6	MS*
Gnd	7		8	TxD
-5.2 Supply	9		10	RxD
-5.2 Supply	11		12	RST*
+1.8V Supply ¹	13		14	DitherAA ²³

In addition to the pin functions described in OIF-ITLA-MSA 1.3, Table 7.1-2 describes the function for the additional pin 13.

Table 7.1-2 Function of additional pin

Pin Numbers	Symbol	Type	Name	Description
13	PS+1.8V	Power	+1.8V Supply	+1.8V Power Supply Note: Usage of pin is optional, as defined by the supplier.

¹ Optional pin use

² Optional pin use

³ Amplitude dither for trace tone functionality (TxTrace).

7.1.3 Electrical Characteristics

In addition to the electrical characteristics in OIF-ITLA-MSA 1.3, Table 7.1-3 provides additional electrical characteristics for the Micro-ITLA.

Table 7.1-3: Additional Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
+1.8V Supply voltage		1.71	1.80	1.89	V
+1.8V Supply current				1000	mA
<u>Absolute Maximum Rating</u> +1.8V Supply Voltage		-0.3		2.0	V

Table 7.1-4 lists the electrical characteristics from OIF-ITLA-MSA 1.3 that are replaced by this implementation agreement.

Table 7.1-4: Replaced Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Power Dissipation ⁴	P_D			5.0	W
<u>Absolute Maximum Rating</u> Operating 'base of butterfly' temperature range ⁵	T_{BTF}	-5		+75	°C
<u>Absolute Maximum Rating</u> Total power dissipation				5	W

⁴ The supply configuration allows an ITLA to either draw all its power from a single supply or from both supplies as long as the total average power dissipation does not exceed P_D .

⁵ Requires adequate heat sinking

8 Transport Layer

The reader should refer back to OIF-ITLA-MSA 1.3 for the definition of the transport layer (section 8).

9 Command Interface (Application Layer)

The reader should refer back to OIF-ITLA-MSA 1.3 for the definition of the command interface (section 9).

10 Alarm and Status Register Behavior

The reader should refer back to OIF-ITLA-MSA 1.3 for the definition of the alarm and status register behavior (section 10).

11 Optical Specifications

The reader should refer back to OIF-ITLA-MSA 1.3 for the optical specifications (section 11).

12 The Mechanical Specifications

This section replaces the mechanical specifications (section 12) in OIF-ITLA-MSA 1.3.

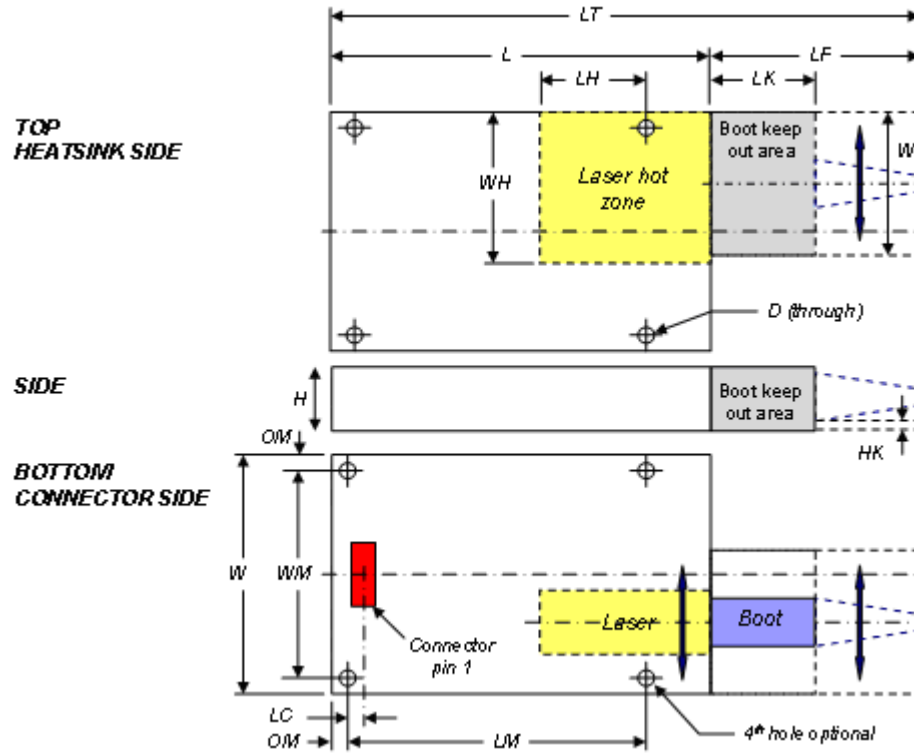
12.1 Micro-ITLA Mechanical Outline Dimensions

Figure 12.1-1 and Table 12.1-1 detail the mechanical outline of the Micro-ITLA. See §7.1.1 for details on the electrical connection.

The minimum fiber bend radius is 15 mm.

The mounting holes are without thread, suitable for M1.6 screws.

Note: the sum of the MAX dimension for L (length of module) and LF (length of fiber boot) exceeds the MAX dimension for LT (total length). The module vendor has the option to trade-off between L and LF, with the condition that MAX dimensions for LT, LF and L are not exceeded.

Figure 12.1-1 Mechanical Outline Dimensions

Table 12.1-1: Mechanical Outline Dimensions

Parameter	Symbol	Value
Width of module	W	20 mm
Length of module	L	MIN 34 mm MAX 45 mm
Total length	LT	MAX 65 mm
Height of module	H	MAX 7.5 mm
Pitch of mounting hole – length direction	LM	30 mm
Pitch of mounting hole – width direction	WM	16 mm
Offset of mounting hole from edge of module	OM	2 mm
Diameter mounting hole	D	2 mm
Offset centerline connector to mounting hole	LC	2 mm
Width fiber boot area	WF	14 mm
Length fiber boot area	LF	MAX 25 mm
Length fiber boot keep out zone	LK	10 mm
Clearance below boot	HK	1 mm
Length between start of laser hot zone and mounting hole	LH	12 mm
Width of laser hot zone	WH	14 mm

13 Appendix A: Open Issues / Current Work Items

None

14 Appendix B: List of Companies and Contributors

14.1 Technical Contributors

Ciena	Ian Betty
CyOptics	John Johnson
Emcore	Genji Tohmon
Emcore	Heino Bukkems
JDSU	Andrew Stoddard
JDSU	Robert Blum
Oclaro	Jinyu Mo
Oclaro	Stephen Gardner
Oclaro	Yi Li
Opnext	Jon Anderson

14.2 List of OIF Member Companies (at time of adoption)

Acacia Communications	Furukawa Electric Japan	Oclaro
ADVA Optical Networking	Google	Orange
Alcatel-Lucent	Hitachi	PETRA
Altera	Huawei Technologies Co., Ltd.	Picometrix
AMCC	IBM Corporation	PMC Sierra
Amphenol Corp.	Infinera	QLogic Corporation
Analog Devices	Inphi	Qorvo
Anritsu	Intel	Ranovus
Avago Technologies Inc.	Ixia	Rockley Photonics
Broadcom	JDSU	Samtec Inc.
Brocade	Juniper Networks	Semtech
BRPhotonics	Kaiaam	Socionext Inc.
BTI Systems	Kandou	Spirent Communications
China Telecom	KDDI R&D Laboratories	Sumitomo Electric Industries
Ciena Corporation	Keysight Technologies, Inc.	Sumitomo Osaka Cement
Cisco Systems	Luxtera	TE Connectivity
ClariPhy Communications	M/A-COM Technology Solutions	Tektronix
Coriant R&G GmbH	Marvell Technology	TELUS Communications, Inc.
CPqD	Mellanox Technologies	TeraXion
EMC Corporation	Microsemi Inc.	Texas Instruments
Emcore	Microsoft Corporation	Time Warner Cable
Ericsson	Mitsubishi Electric Corporation	US Conec
ETRI	Molex	Verizon
FCI USA LLC	MoSys, Inc.	Xilinx
Fiberhome Technologies Group	NEC	Yamaichi Electronics Ltd.
Finisar Corporation	NeoPhotonics	ZTE Corporation
Fujikura	NTT Corporation	
Fujitsu	O-Net Communications (HK) Limited	

15 Document Index

A

Absolute Maximum Ratings16

C

Connector

 Electrical.....9

 Pin assignments9

Conventions.....7

D

Document

 Scope8

E

Electrical Characteristics9, 10, *See* Specifications

M

Mechanical Specifications

 Module.....15

P

Physical interfaces9

Pin Assignments9

R

References7